CEMENT PLUS®

QUALITY MORTARS

#CreateSomethingUnique

discover our

PRODUCTS

and

SYSTEMS



Introducing a better way to create



eco friendly production

Sustainable development and environmental responsibility. We adopt innovative production methods with the minimum energy footprint. We perceive sustainable development as a necessary responsibility, hence, we constantly improve environmental performance by adopting the best practices in the production process and implementing effective environmental management systems and biodiversity management plans.

SYSTEM CERTIFICATION ISO 9001

SYSTEM CERTIFICATION ISO 14001

GEV-EMICODE EC 1 PLUS sehr emissionsarm

ZERO WASTE TO LANDFILL

PLATINUM EURO CERT

EPD® THE INTERNATIONAL EPD® SYSTEM

www.bearthproject.gr **ECO-CHIC DECOR**

embracing the beauty of recycled mortars and concrete



about us

Mother company **Cement Plus** produces premixed mortars for architectural finishes.
Transforming waste into art, our **Bearth** Project unit produces extra ordinary decorative objects from the remnants of premixed mortars production.



the project

With our commitment to environmental responsibility, we are paving the way for a greener future.
By repurposing the byproducts of the construction industry, we minimize waste and reduce our ecological footprint.



bearth
the cement revival project

bearth.project

scan here
e-shop



NANO STUCCO 500

Premium, smooth finish, microcement

Nanostucco 500 is a fine grained microcement, which is used as a final coating on floors, walls and furniture. It is applied with a trowel in 0.8 - 1.0 mm thickness. Thanks to its excellent properties, when applied on a smooth surface, free of cracks, it is not necessary to use primer and fiberglass mesh.

Characteristics

·Superior quality ·Excellent adhesion and elasticity ·High strength and abrasion resistance
·Quick and easy application ·Hydrophobic ·Indoors and outdoors use
·Consumption: 0,8-1.0 kg/m

Application Chart










Layers

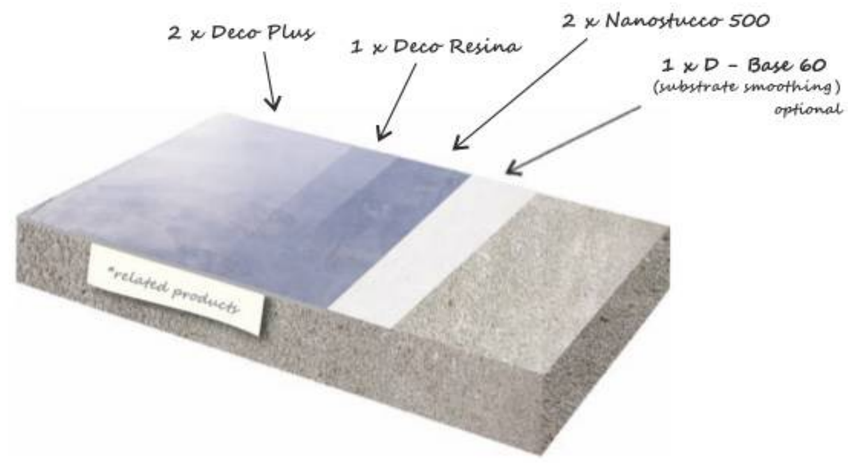

*** system products**

C Primer Plus, quartz bonding primer (optional)
D- Base 60, substrate repairing and smoothing cementitious mortar, fast setting (optional)
Glass Tex 74 / 160, reinforcement mesh (optional)
Nanostucco 500 microcement
Colorfresh, acrylic protective sealer for vertical surfaces & furniture
Deco Resina, PU sealer primer
Deco Plus, PU protection sealer for floors & bathrooms



NANOFIN 50

velvet

Premium, velvet finish, microcement

Smooth textu

Nanofin 50 velvet microcement is used as a final coating on floors, walls and furniture. It is applied with a trowel in 0.9 - 1.1 mm thickness. Thanks to its excellent properties, when applied on a smooth surface, free of cracks, it is not necessary to use primer and fiberglass mesh.

Characteristics

re and velvet look Excellent adhesion and elasticity High strength and abrasion resistance Hydrophobic Indoors and outdoors use Quick and easy application

·Consumption: 0.9 - 1.1 kg/m

Application Chart










Layers

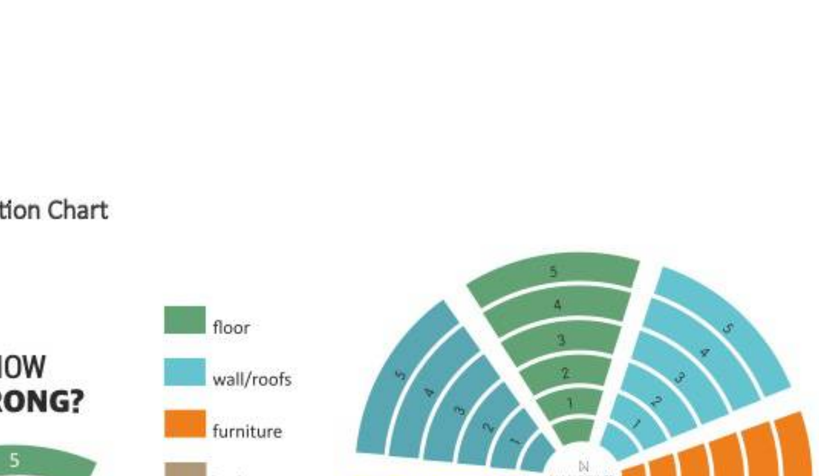

*** system products**

C Primer Plus, quartz bonding primer (optional)
D- Base 60, substrate repairing and smoothing cementitious mortar, fast setting (optional)
Glass Tex 74 / 160, reinforcement mesh (optional)
Nanofin 50 velvet microcement
Colorfresh, acrylic protective sealer for vertical surfaces & furniture
Deco Resina, PU sealer primer
Deco Plus, PU protection sealer for floors & bathrooms

20

EXPLORE THE 20 SHADES OF

earth



Nanofin 50 velvet is available in 20 pre-mixed colors.

NANOFIN 50
velvet

Premium, velvet finish, microcement

scan here

COLOR CHART

CEMENT FREE

natura50
velvet

the 1st premium
micro-coating

CEMENT FREE


Natura 50 velvet is the first cement free (micro-coating), ultra high resistance coating for surfaces finishing . It is used as a final coating on floors, walls and furniture textured and natural look. It is applied with a trowel in 0.9 -1.1 mm thickness. Thanks to its excellent properties, when applied on a smooth surface, free of cracks, it is not necessary to use primer and fiberglass mesh.

Characteristics

·Excellent adhesion and very high elasticity ·High strength and abrasion resistance
·Hydrophobic ·Indoors and outdoors use ·Quick and easy application
·Consumption: 0.9 - 1.1 kg/m²

Application Chart



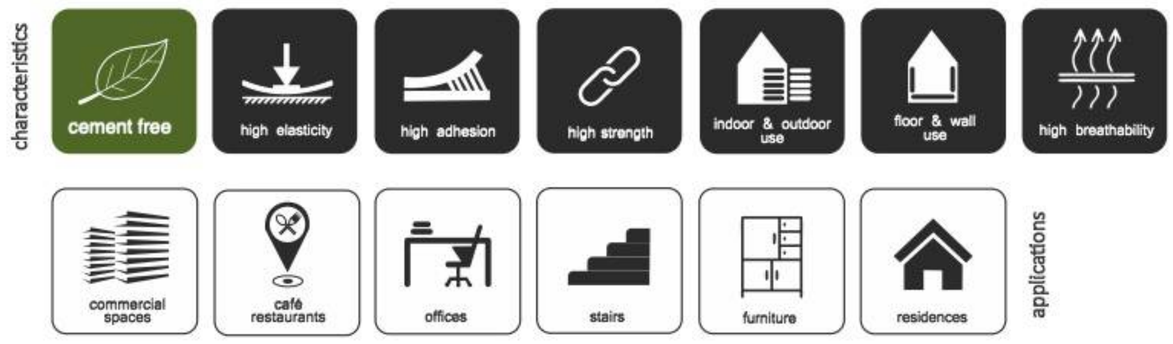

Layers



*** system products**

C Primer Plus, quartz bonding primer (optional)
D- Base 60, substrate repairing and smoothing cementitious mortar, fast setting (optional)
Glass Tex 74 / 160, reinforcement mesh (optional)
Natura 50 velvet micro-coating
Deco Resina, PU sealer primer
Deco Plus, PU protection sealer for floors & bathrooms



NANOFIN METAL

Premium microcement metal

Nanofin Metal is a cementitious decorative coating consisting of pure metallic filings. Suitable for application on walls and furniture. Creates a smooth surface with the appearance of a metal sheet. It provides a natural aging, such as a typical metallic surface.
Applied in 0.5-1.0 mm thickness.

*The product application of material should be performed by professionals.

Characteristics

·Unique aesthetic result ·Superior quality ·Excellent adhesion and elasticity ·Hydrophobic
·Indoors use ·Consumption: 0.5-1.0 kg/ m²

Application Chart







Layers



*** system products**


C Primer Plus, quartz bonding primer (optional)
D- Base 60, substrate repairing and smoothing cementitious mortar, fast setting (optional)
Glass Tex 74 / 160, reinforcement mesh (optional)
Nanostucco 500, microcement
Nanofin metal microcement
Nanofin wax, natural wax and soap

03

EXPLORE THE 3 SHADES OF

metal

Nanofin Metal
is available in
3 pre-mixed
colors.

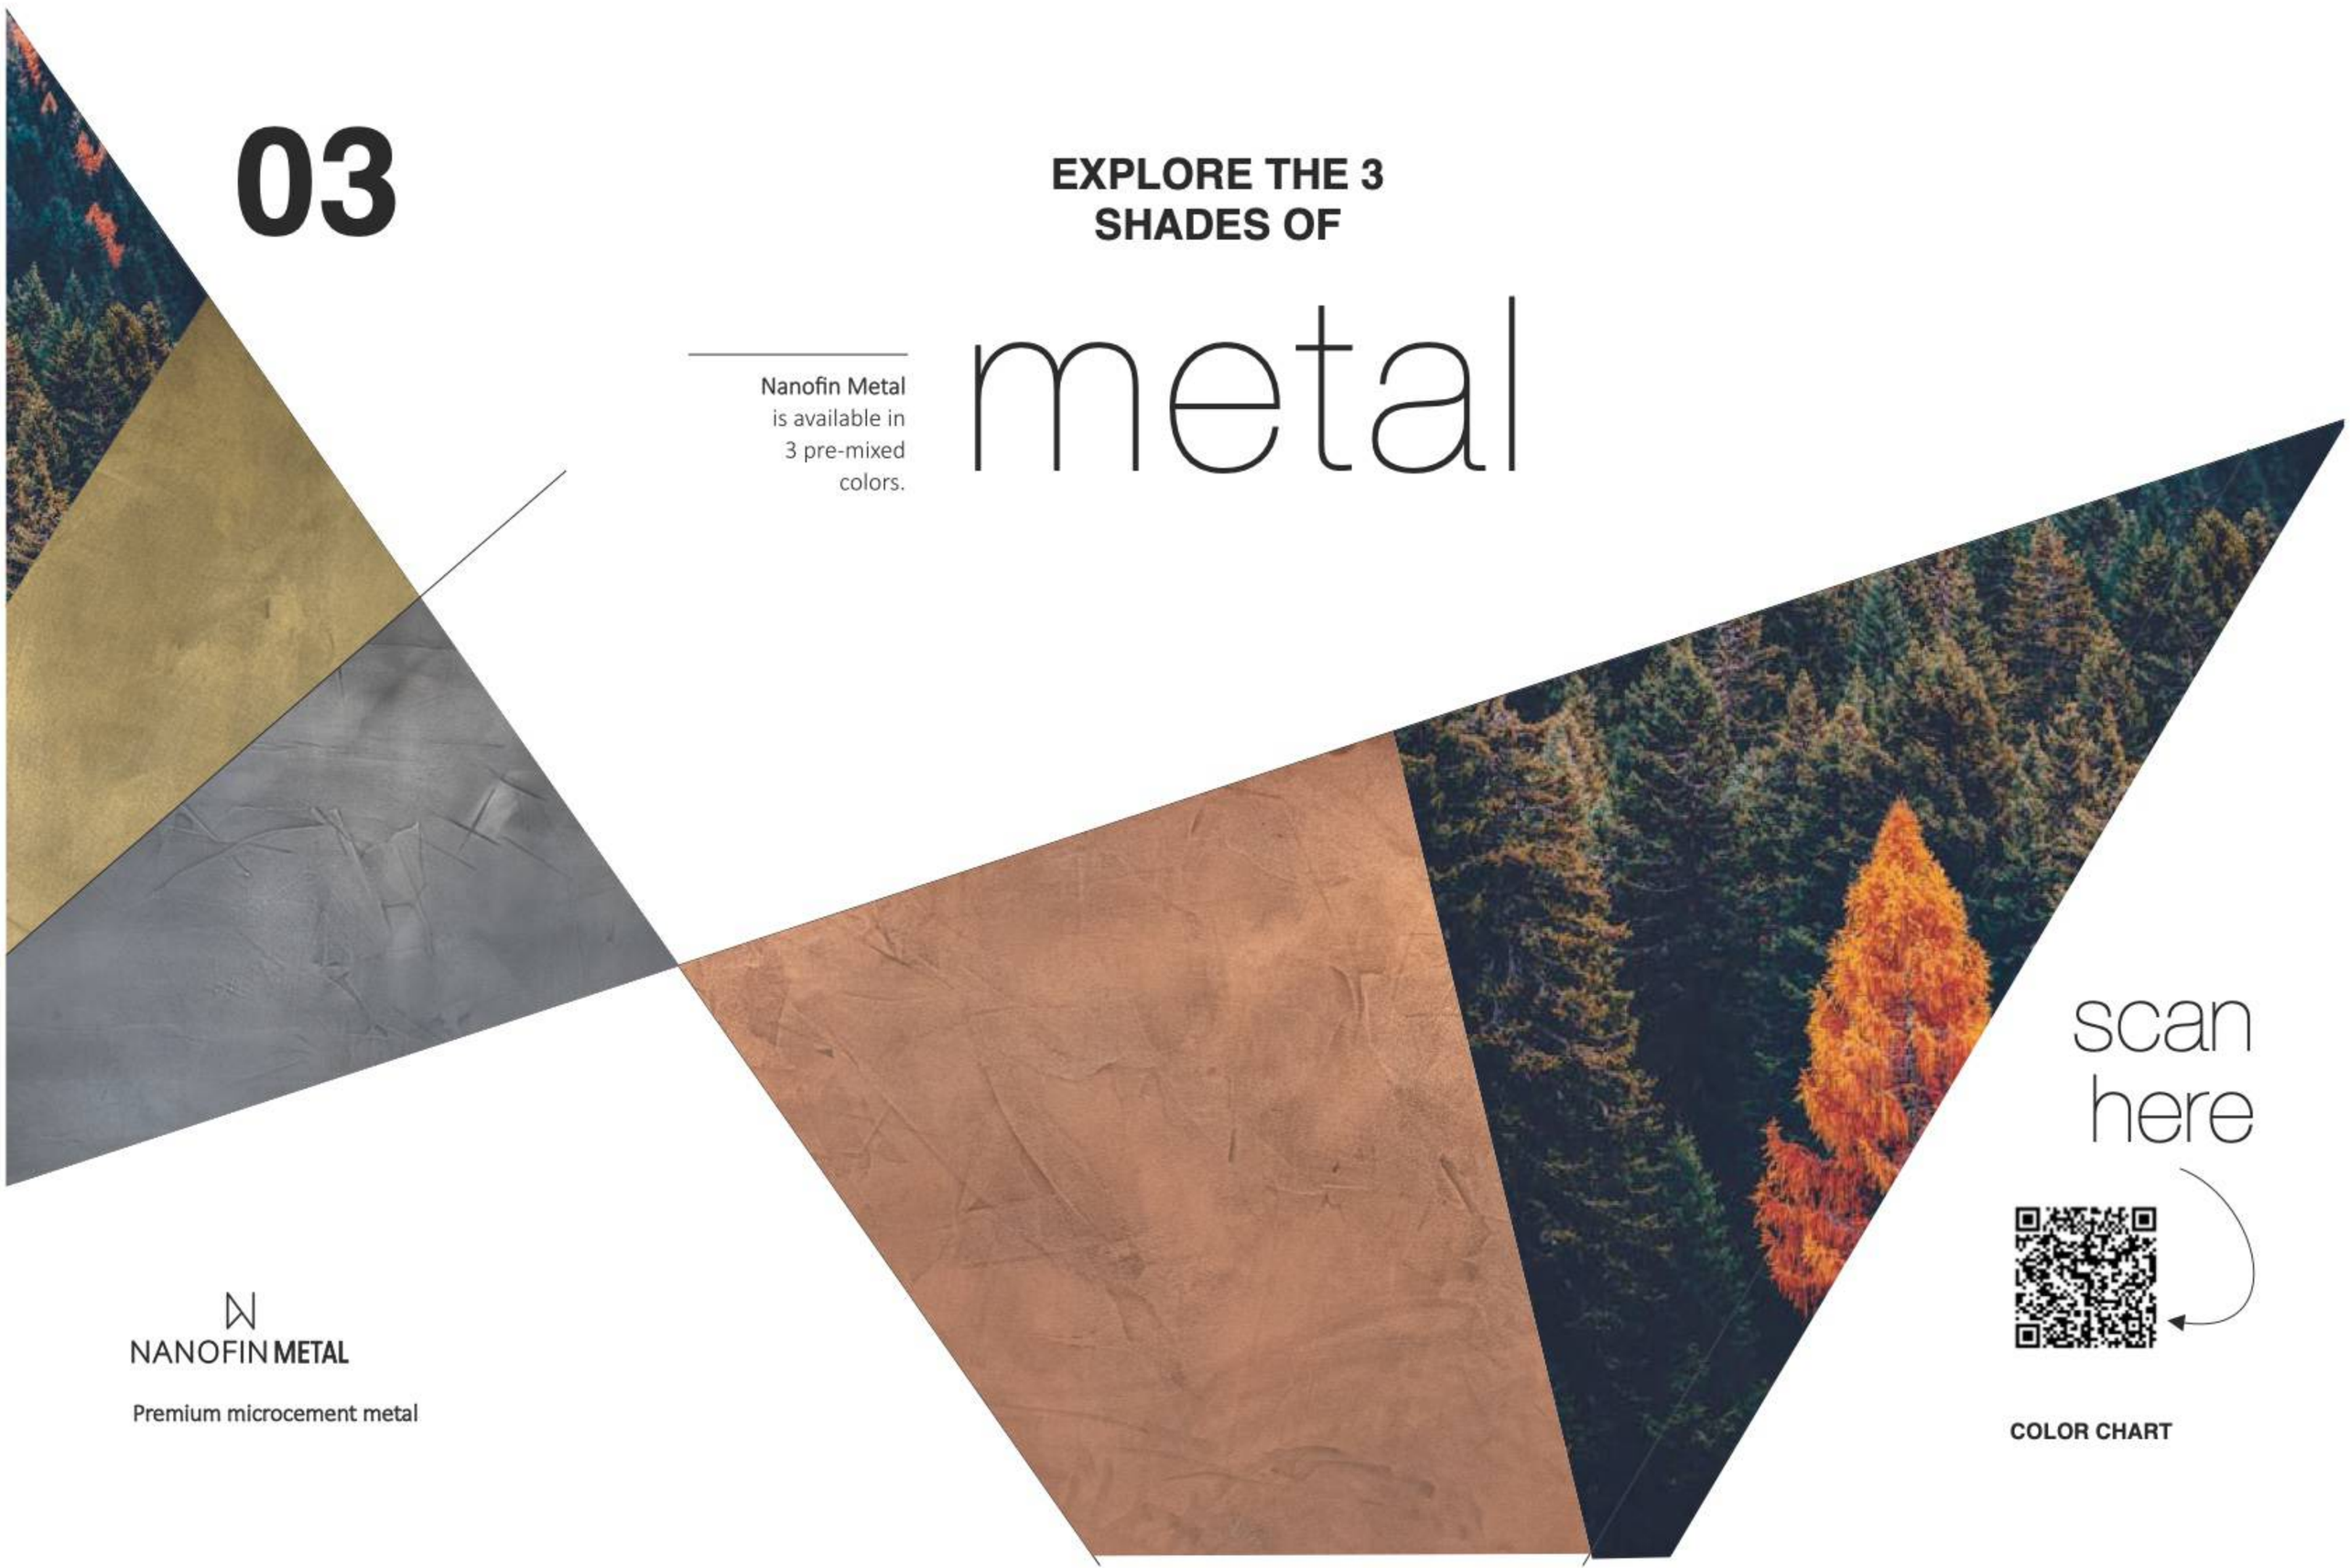

scan here

COLOR CHART


NANOFIN METAL

Premium microcement metal


ELEMENT:20 one product, four finishes

Premium style walls



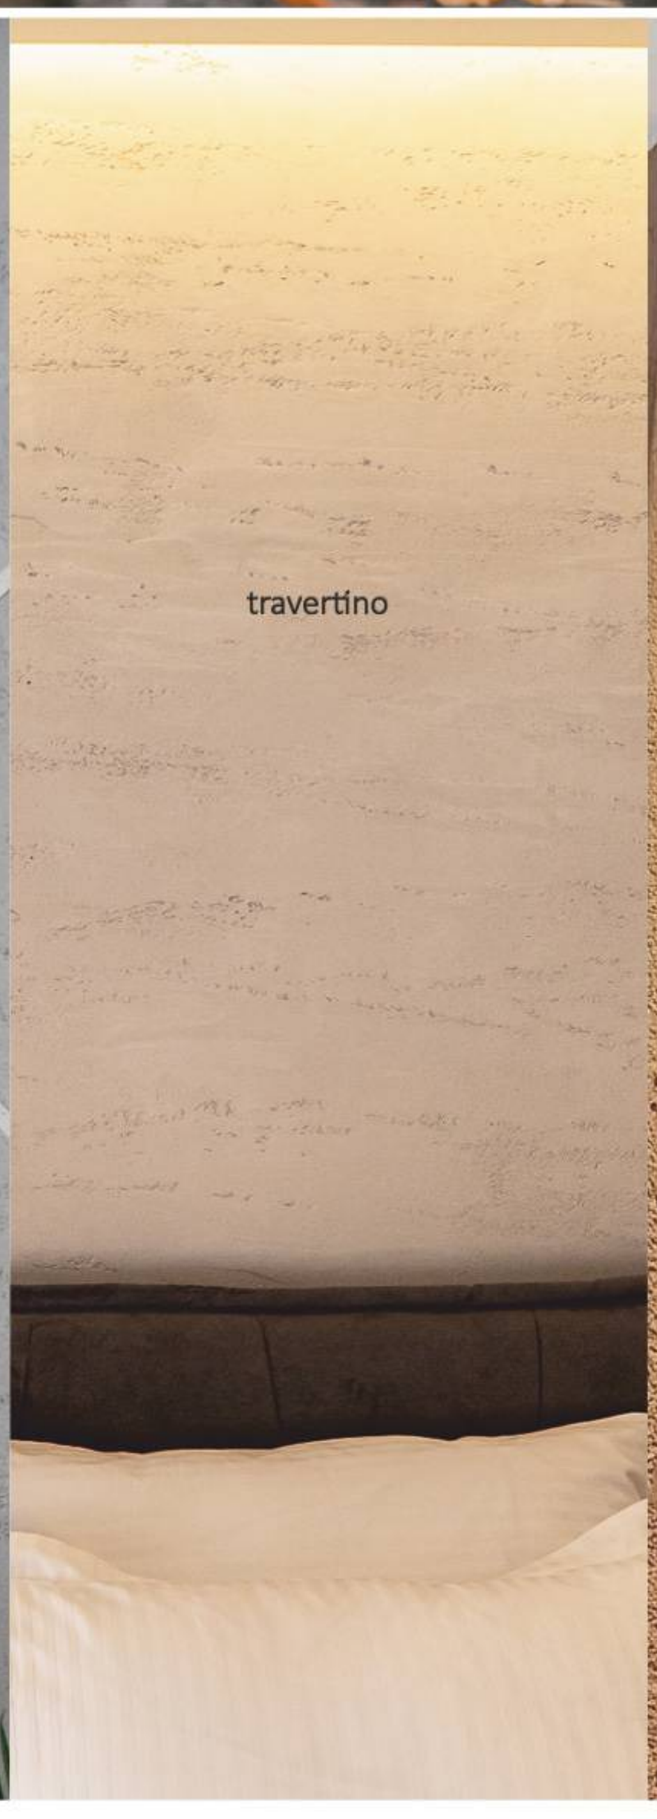



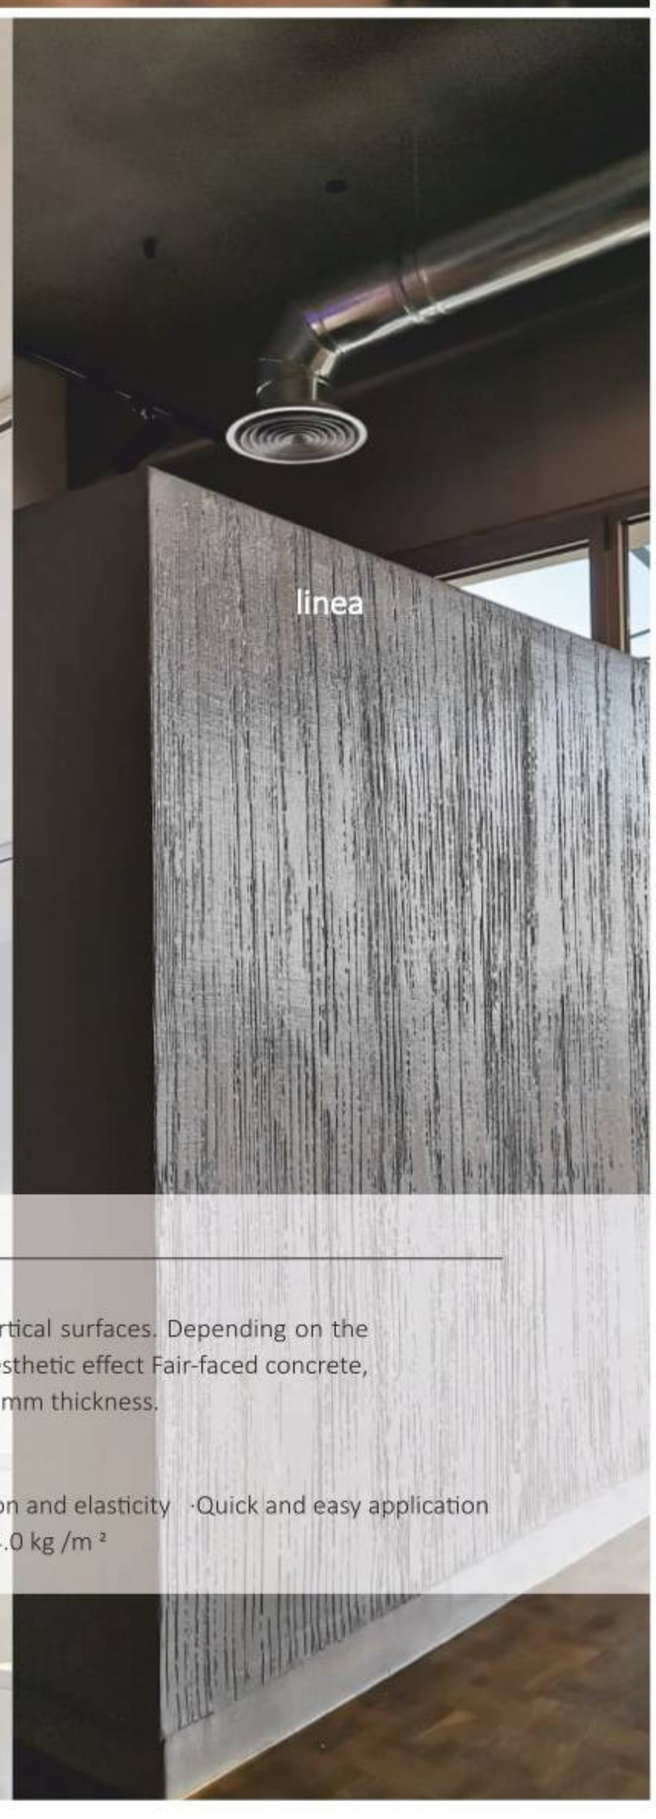



Element 20 is applied as a final coating on vertical surfaces. Depending on the application technique it can give a different aesthetic effect Fair-faced concrete, Travertino, Bamboo, Linea. Applied in 3.0 - 4.0 mm thickness.

Characteristics

·High quality ·Hydrophobic ·Excellent adhesion and elasticity ·Quick and easy application
·Indoor and outdoor use ·Consumption: 3.0 -4.0 kg /m ²

Application Chart

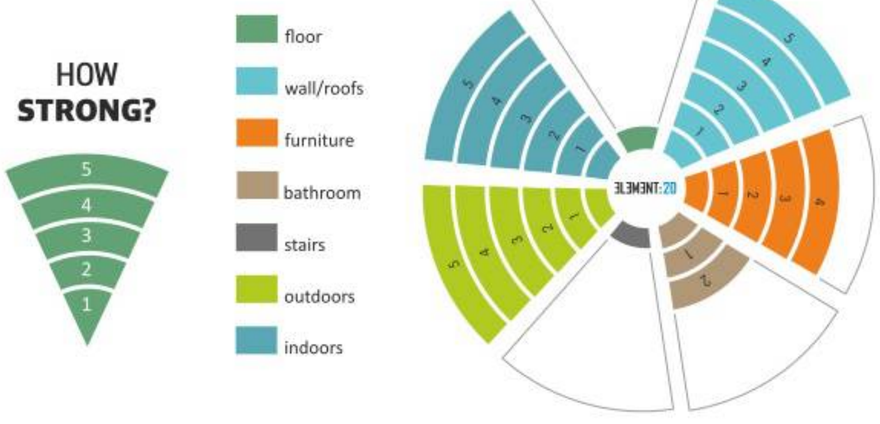

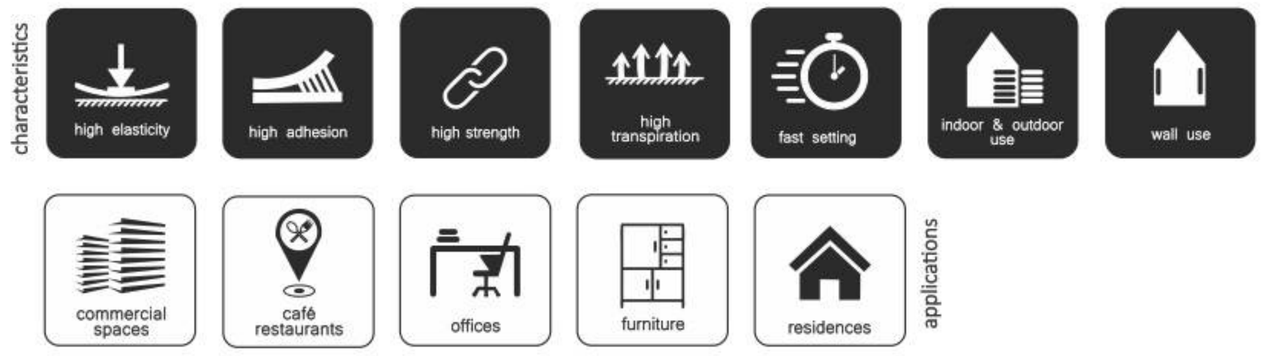

Layers

*** system products**

C Primer Plus, quartz bonding primer (optional)
Element 20
Colortec, acrylic matte sealer / Colorfresh, acrylic satin sealer (depending on the finish)
Glass Tex 74 / 160, reinforcement mesh (optional)



ELEMENT:10

Retro walls

Element 10 consists of selected natural aggregates and is used as a final coating on vertical surfaces. It gives the appearance of an aged, coarse, timeless finish.
Applied in 2.0 - 2.5 mm thickness.

Characteristics

·High quality ·Hydrophobic ·Quick and easy application ·Indoor and outdoor use
·Consumption: 2.0-2.5 kg /m²

Application Chart










Layers

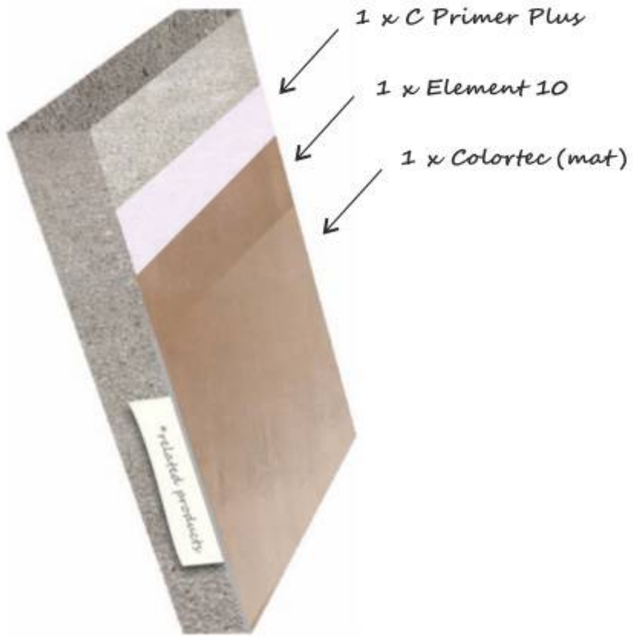

*** system products**

C Primer Plus, quartz bonding primer (optional)
Element 10
Colortec, acrylic matte sealer / Colorfresh, acrylic satin sealer (depending on the finish)
Glass Tex 74 / 160, reinforcement mesh (optional)



CEMENT FREE

paint
natura

natural brush paint

CEMENT FREE

Cement-free geopolymer architectural coating with a natural textured finish. This colored natural brush paint is designed for vertical surfaces and applied with a wide brush at a 0.3 mm thickness.

Characteristics

·High aesthetic ·Indoors and outdoors use ·Easy maintenance ·High strength
·Consumption 0,3 kg/m²

Application Chart









Layers



---

* related products

Res Primer Plus, synthetic resin
Paint Natura
Natura Seal, acrylic varnish

CEMENT FREE

12

Paint Natura
is available in
12 pre-mixed
colors.

EXPLORE THE 12 SHADES OF

nature



paint
natura
Natural brush paint

scan
here

COLOR CHART

CEMENT FREE

creativo
natura

pure textured surfaces

CEMENT FREE

Cement-free new generation wall plaster designed to create unique textures, handcrafted effects and expressive architectural surfaces.

Characteristics

·High aesthetic ·Indoors and outdoors use ·Easy maintenance ·High strength
·Consumption 3.0-4.0 kg/m²

Application Chart










Layers

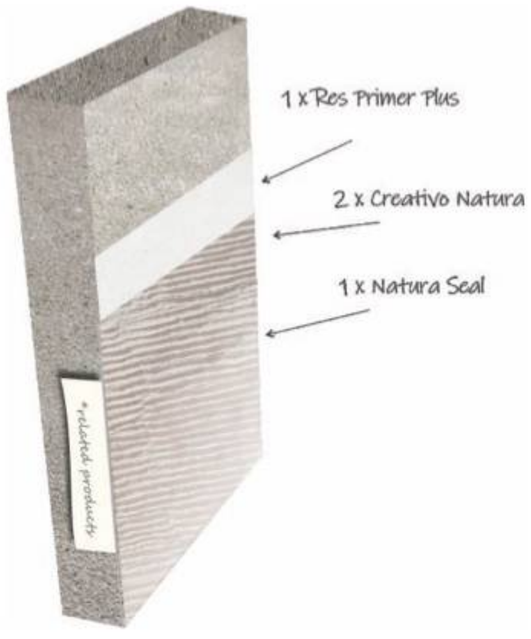

* related products

Res Primer Plus, synthetic resin
Creativo Natura
Natura Seal, acrylic varnish

CEMENT FREE

EXPLORE THE 6 SHADES OF

creativo

06

Creativo Natura is available in 6 pre-mixed colors.



creativo
natura
Pure textured surfaces

TX RASO

Exposed concrete wall

TX RASO is a high strength architectural mortar, designed to be used on vertical surfaces and ceilings. It gives the appearance of “a wooden mould” concrete. It is applied with a trowel to a thickness of 4.0 - 5.0 mm.


Characteristics

·High aesthetic ·Hydrophobic ·Quick and easy application ·Indoor and outdoor use
·Consumption: 4.0 - 5.0 kg /m ²

Application Chart





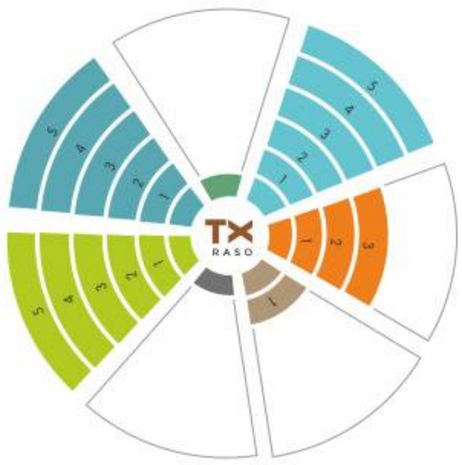



Layers



*** system products**

C Primer Plus, quartz bonding primer (optional)
TX Raso
Colortec, acrylic matte sealer / Colorfresh, acrylic satin sealer (depending on the finish)
Glass Tex 74 / 160, reinforcement mesh (optional)



03

EXPLORE THE 3 SHADES OF

concrete

TX Raso
is available in
3 pre-mixed colors.

TX RASO

Exposed concrete wall

scan here

COLOR CHART

r resaic

Liquid mosaic

Resaic is a flooring system based on resin materials and provides the terrazzo effect.
Applied in 1 mm thickness.

Characteristics


·High aesthetic ·Hydrophobic ·High abrasion resistance

Application Chart





Layers

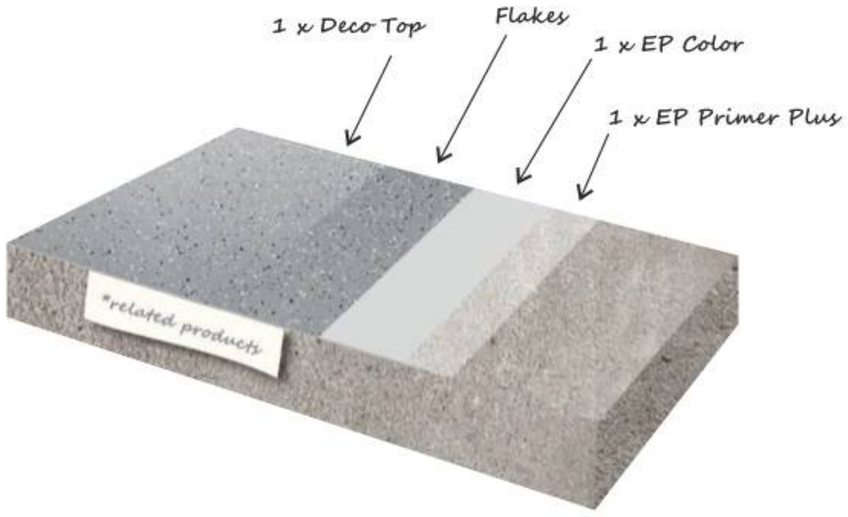

*** system products**

EP Primer Plus, epoxy primer
EP Color, epoxy paint
Flakes, acrylic flakes
Deco Top, aliphatic polyurethane

Create the combination of your choice from a wide range of colors.

EXPLORE THE UNLIMITED SHADES OF

mosaic



resaic
Liquid mosaic

INTO TECT resin

Granite walls

Architectural resin coating for building facades and individual architectural elements, consisting of marble and granite particles.
Applied in 4.0 mm thickness.

Characteristics

·High aesthetic ·Indoors and outdoors use ·Easy maintenance ·High strength
·Consumption: 4.0 - 4.5 kg /m ²

Application Chart










Layers

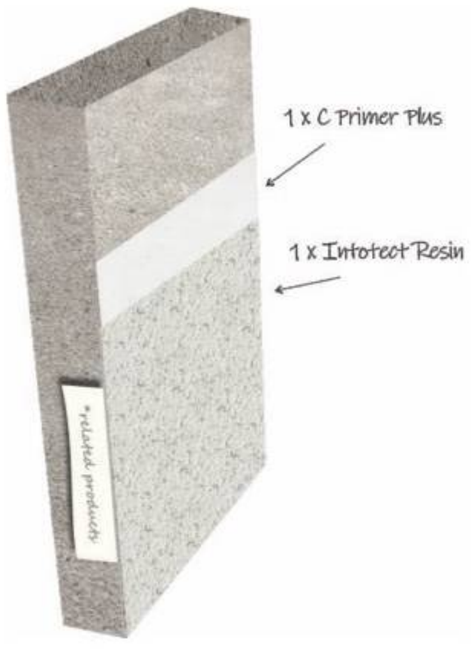

* related products

C Primer Plus, quartz bonding primer
Intotect Resin, acrylic paste

08

Intotect Resin
is available in
8 colors.

EXPLORE THE 8 SHADES OF

granite



INTO TECT resin

Granite walls

scan here

COLOR CHART

PAVITECT resin

Premium quartz floor system

Pavitect Resin is a quartz floor system consisting of fine-aggregates (pebble, quartz etc.) and the addition of the appropriate adhesive resins. Suitable for applications on horizontal surfaces. It provides anti slip characteristics and requires an easy maintenance. Applied in 5.0 -15 mm thickness.

Characteristics

·High aesthetic ·Hydrophobic ·Anti-slip ·High resistance to compression and abrasion

Application Chart










Layers

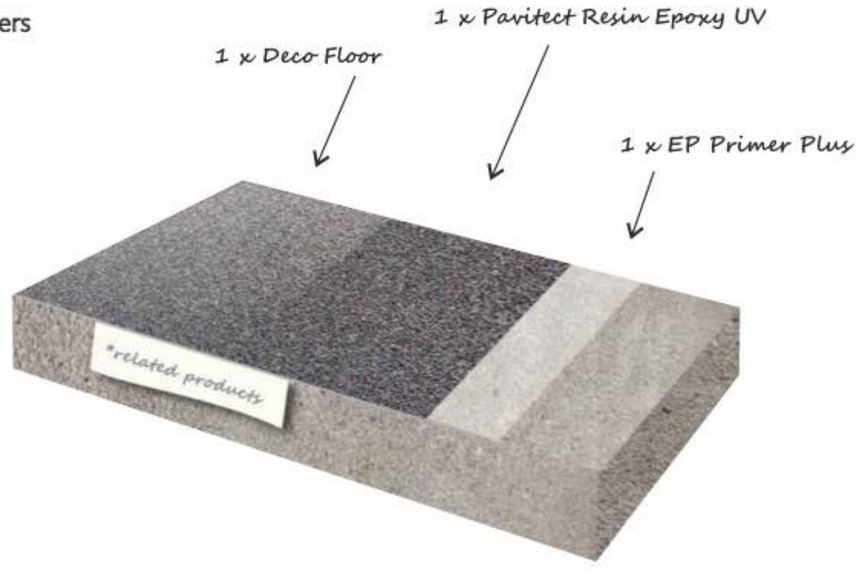

*** related products**

EP Primer Plus, epoxy primer
Pavitect Resin Epoxy UV or PU 2K, epoxy resin
Deco Floor, aliphatic polyurethane sealer

09

EXPLORE THE 9 SHADES OF

quartz

Pavitect Resin is available in 9 colors.



PAVI TECT resin

Premium quartz floor system

scan here

COLOR CHART

UPGRADE YOUR MATERIALS LIBRARY





Our Sample Boxes are special tools provided to professionals in order to assist them to #CreateSomethingUnique". Every sample box contains physical pieces of our architectural materials, giving the opportunity to fully visualize **materials' color, texture and style**.

read more...

Where?






nanostucco 500




nanofin 50 velvet

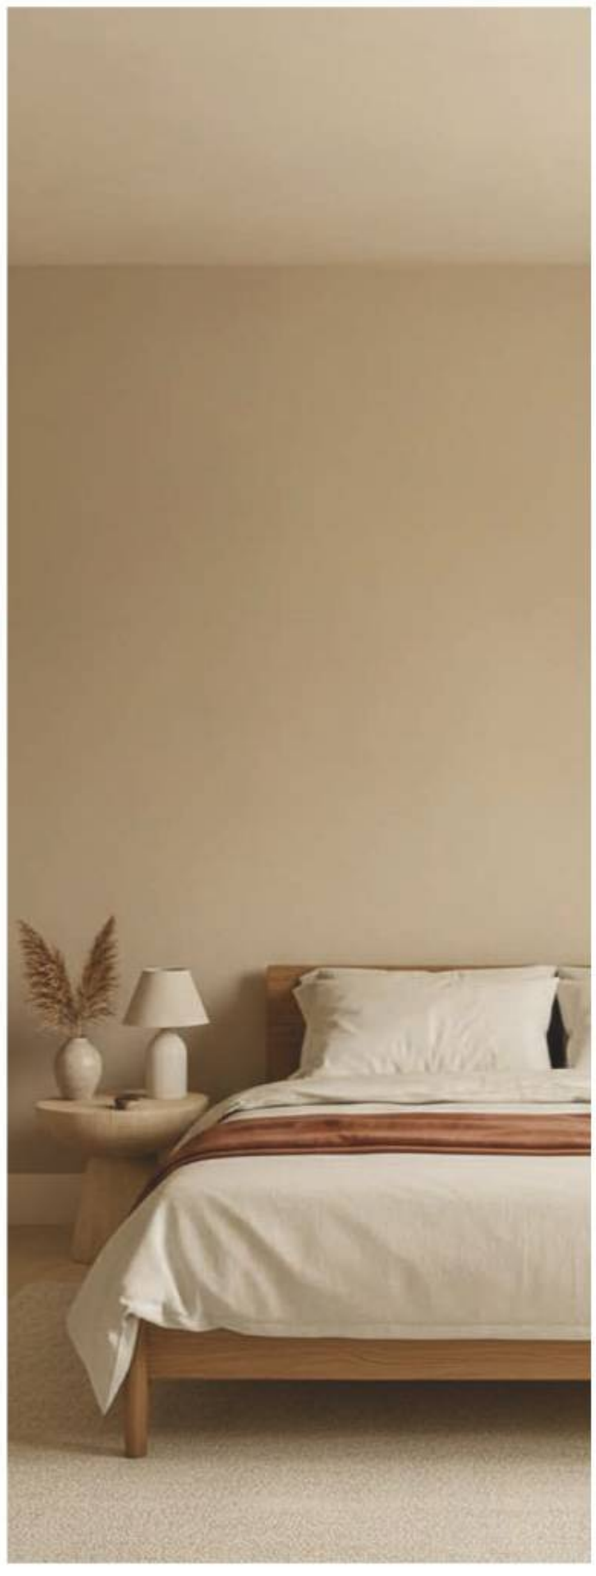

natura 50 velvet



nanofin metal

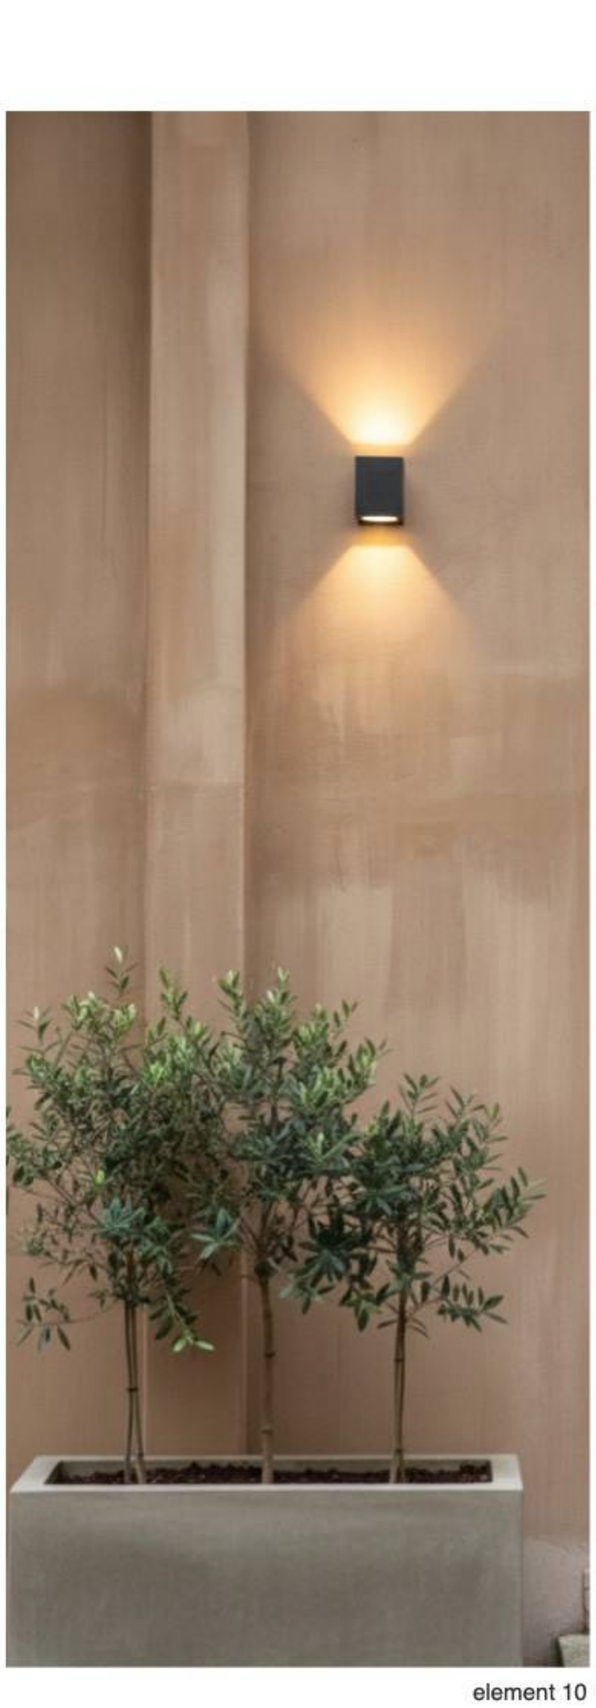

element 10




element 20



paint natura



creativo natura

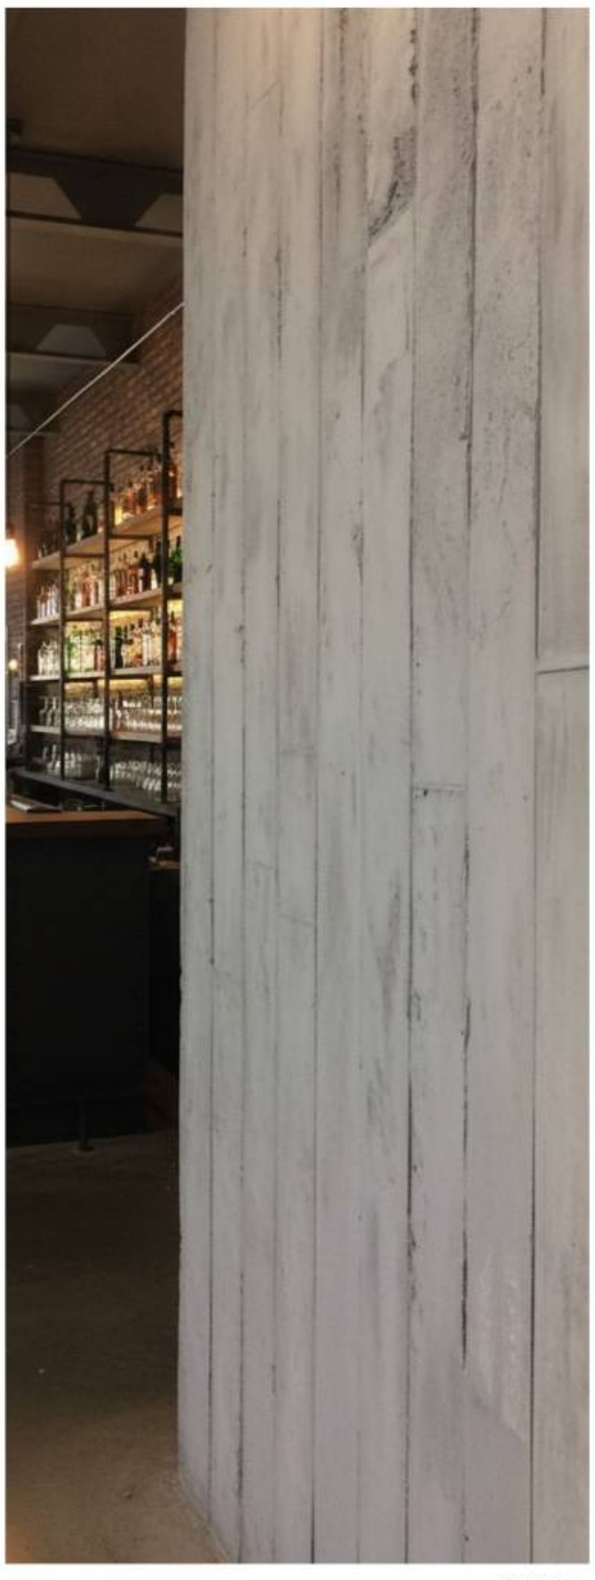

tx raso



resaic



intotect resin



pavitect resin

QUALITY MORTARS

CEMENT PLUS

your natural choice!

Cement Plus

3rd klm O.N.Road Larissa - Thessaloniki 41336 Larissa, Greece, T.: +30 2410 611163, E.: info@cementplus.gr